


Coal Gangue Backfilling Machine

TCJ-D80/30/67 TCJ-Y80/30/67 TCJ-D80/40/89

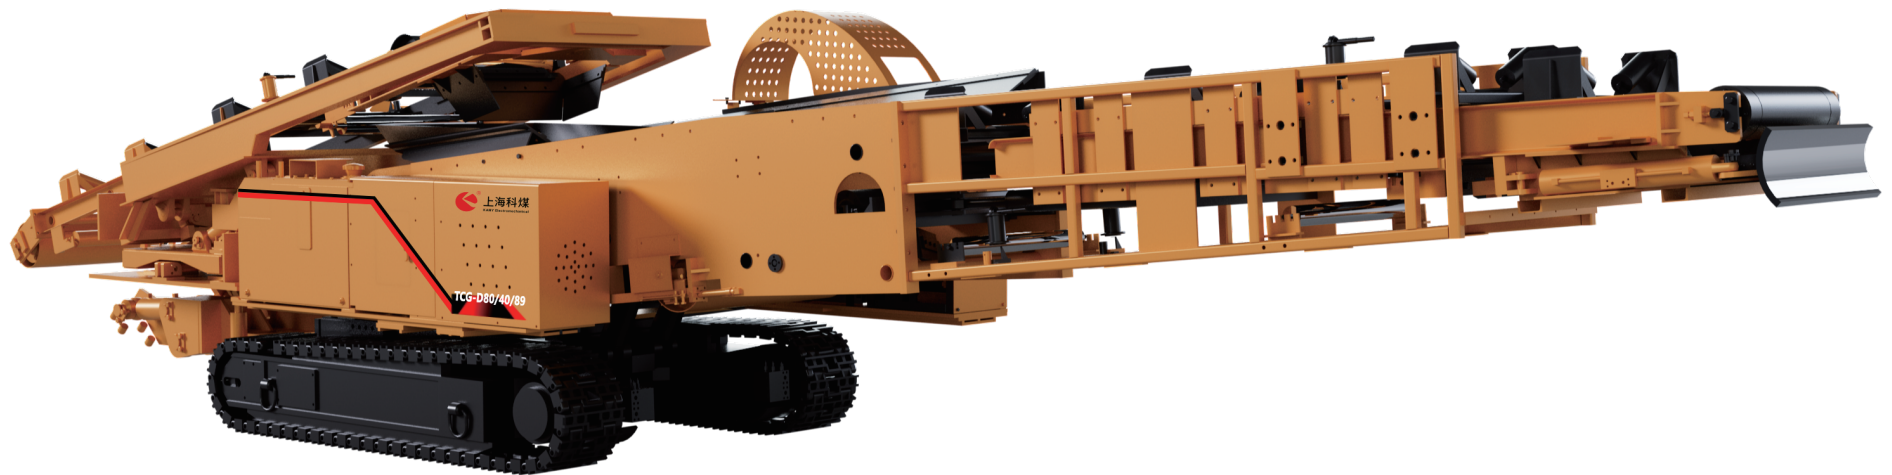

Múltiples modos de control

Control a corta distancia, control remoto y control a larga distancia



Velocidad de descarga del cinturón ajustable

Velocidad de lanzamiento hasta 3.5 m/s, adaptable a varias condiciones.



Series de la máquina

Modelos de alto perfil, bajo perfil y ultra bajo perfil disponibles, aptos para diversas condiciones de carretera.





Mecanismo de rulo de piedras Intercambiable

Puede equiparse con un rodillo eléctrico para cumplir con diferentes requisitos.

- 2018-1 Grupo Linmin
Luxi Mine: Coal Gangue Backfilling Machine
- 2019-12 Chenghe Mining
Bailiang Xusheng Mine: Coal Gangue Backfilling Machine
- 2021-6 Huayang Group, No.1 Mine
Corollary equipment for Shanghai Chuangli Group TBM
- 2021-8 Wulan Group, Manlailiang Mine
Roadway Backfilling Mining under Open-Pit Slope
- 2022-11 Shaanxi Coal and Chemical Industry
Shuanglong Coal Mine: Coal Gangue Backfilling Machine
- 2022-12 Shandong Energy Group
Shuangxin Coal Mine: Intelligent Coal Gangue Backfilling Machine
- 2023-4 Shaanxi Coal and Chemical Industry Group, Huangling Mining
Ruineng Coal Mine: Coal Gangue Backfilling Machine
- 2023-7 Xiangmin Group, Shangliang Coal Mine
Coal Gangue Backfilling/Auxiliary Rehaul System behind Continuous Miner
- 2023-12 Shanxi Taiyuan Dongshan Group
Dongxing Coal Mine: Coal Gangue Backfilling Machine
- 2024-3 Shaanxi Coal and Chemical Industry Group, Huangling Mining
No.1 Coal Mine: Intelligent Coal Gangue Backfilling Machine
- 2025-2 Anhui Hengyuan Coal & Power Group
Qianyingzi Mine: Coal Gangue Backfilling Machine
- 2025-3 Anhui Hengyuan Coal & Power Group
Hengyuan Mine: Coal Gangue Backfilling Machine
- 2025-4 Shanxi Coal Transportation and Sales Group
Jin Xinda Coal Mine: Continuous Coal Gangue Disposal System

Artículo	Ultra-Low Profile	Low Profile	High Profile
Rango de altura de carretera aplicable	2~2.5m	2.4~3.5m	3.0~4.5m
Rango de Ancho de Carretera Aplicable	3~5m	3~6m	4~6m
Ángulo de inclinación de la carretera aplicable	±16°	±16°	±16°
Capacidad de transmisión	400t/h	300t/h	300t/h
Potencia instalada	89kW	67kW	67kW
Dimensiones generales(L×W×H)(Min.)	11.3×2.25×1.8m	12.07×2.25×2.16m	14.67×2.25×2.68m
Tamaño máximo de bulto	≤250mm	≤250mm	≤250mm
Peso total	19t	22t	23t
Anchura de la banda de alimentación y descarga	800mm	800mm/1000mm	800mm/1000mm
Velocidad de alimentación y descarga de la cinta	2~2.5m/s	2~2.5m/s	2~2.5m/s
Ángulo de ajuste de desviación	±5°	±5°	±5°
Ajuste de desviación	400mm	400mm	400mm
Ajuste del Ángulo del Mecanismo de Nivelación	—	±6°	±6°
Ángulo de oscilación del frente y la parte trasera	±3°	±4°	±4°
Potencia de tambor eléctrico/hidráulico	22kW	22kW	22kW
Diámetro del tambor eléctrico/hidráulico	φ500mm	φ500mm	φ500mm
Ancho del cinturón de lanzamiento	800mm	800mm	800mm
Velocidad de lanzamiento de cinturón	0~3.5m/s	0~3.5m/s	0~3.5m/s
Modo de viaje	Tipo de rastreador	Tipo de rastreador	Tipo de rastreador
Velocidad de viaje	0~7m/min	0~7m/min	0~7m/min
Presión de tierra	0.09MPa	0.09MPa	0.11MPa
Presión de trabajo del sistema	23MPa	23MPa	23MPa
Potencia del motor de la bomba de aceite	45kW	45kW	45kW
Tensión de suministro	1140/660V	1140/660V	1140/660V
Distancia del control remoto	60m	60m	60m
Peso/Dimensiones Máx	1230kg/4.6×1.06×1.3m	1000kg/3.6×1.3×0.95m	1000kg/3.6×1.3×0.95m

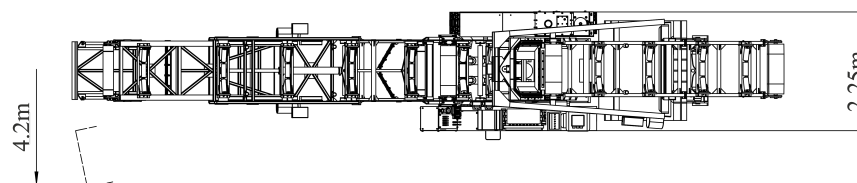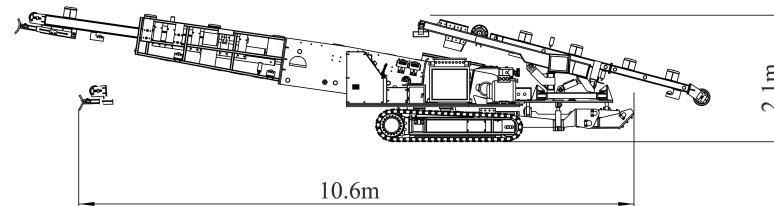

上海科煤机电设备制造有限公司

地址: 上海市松江区洞泾镇洞凯路201号 电话: 86-021-57675765 邮编: 201619
网址: www.shkm.com www.kamychina.com Email: hello@shkm.com



上海科煤
KAMY Electromechanical

